


VD12A SECTIONAL VALVE

MODEL	VD12A
TYPE	SECTIONAL
FLOW	240 LPM
CIRCUIT	PARRALLEL & SERIES
MAX PRESSURES	P=280bar A&B=315bar T=20bar
MAIN RELIEF	Std 175 bar, Options Available
PORT RELIEF	OPTIONAL
POWER BEYOND	OPTIONAL
PORTS - BSP	P=1 A/B=1 T=1



NUMBER OF SPOOLS	1 TO 8
SPOOL TYPES	CYLINDER MOTOR SINGLE ACTING FLOAT
SPOOL CONTROLS AND OTHER OPTIONS	MANUAL PNEUMATIC CABLE REMOTE MICROSWITCH DETENT HYDRAULIC PILOT ANTI-CAV CHECKS ELECTRO-PROPORTIONAL

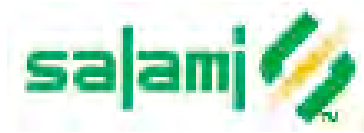